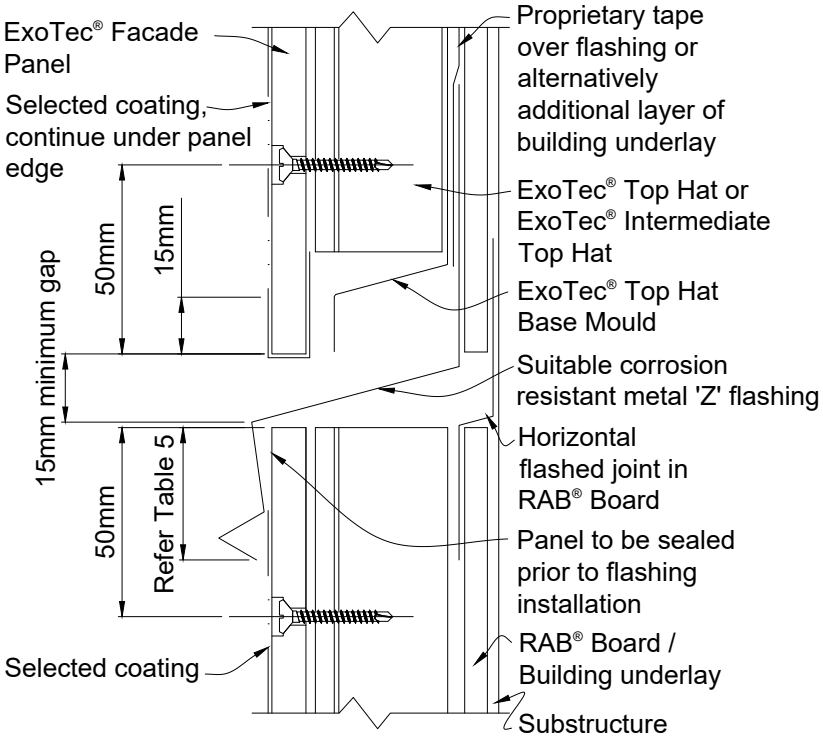
ExoTec® Facade Panel
Selected coating, continue under panel edge
50mm
15mm
15mm minimum gap
50mm
Refer Table 5
Selected coating
Proprietary tape over flashing or alternatively additional layer of building underlay
ExoTec® Top Hat or ExoTec® Intermediate Top Hat
ExoTec® Top Hat Base Mould
Suitable corrosion resistant metal 'Z' flashing
Horizontal flashed joint in RAB® Board
Panel to be sealed prior to flashing installation
RAB® Board / Building underlay
Substructure