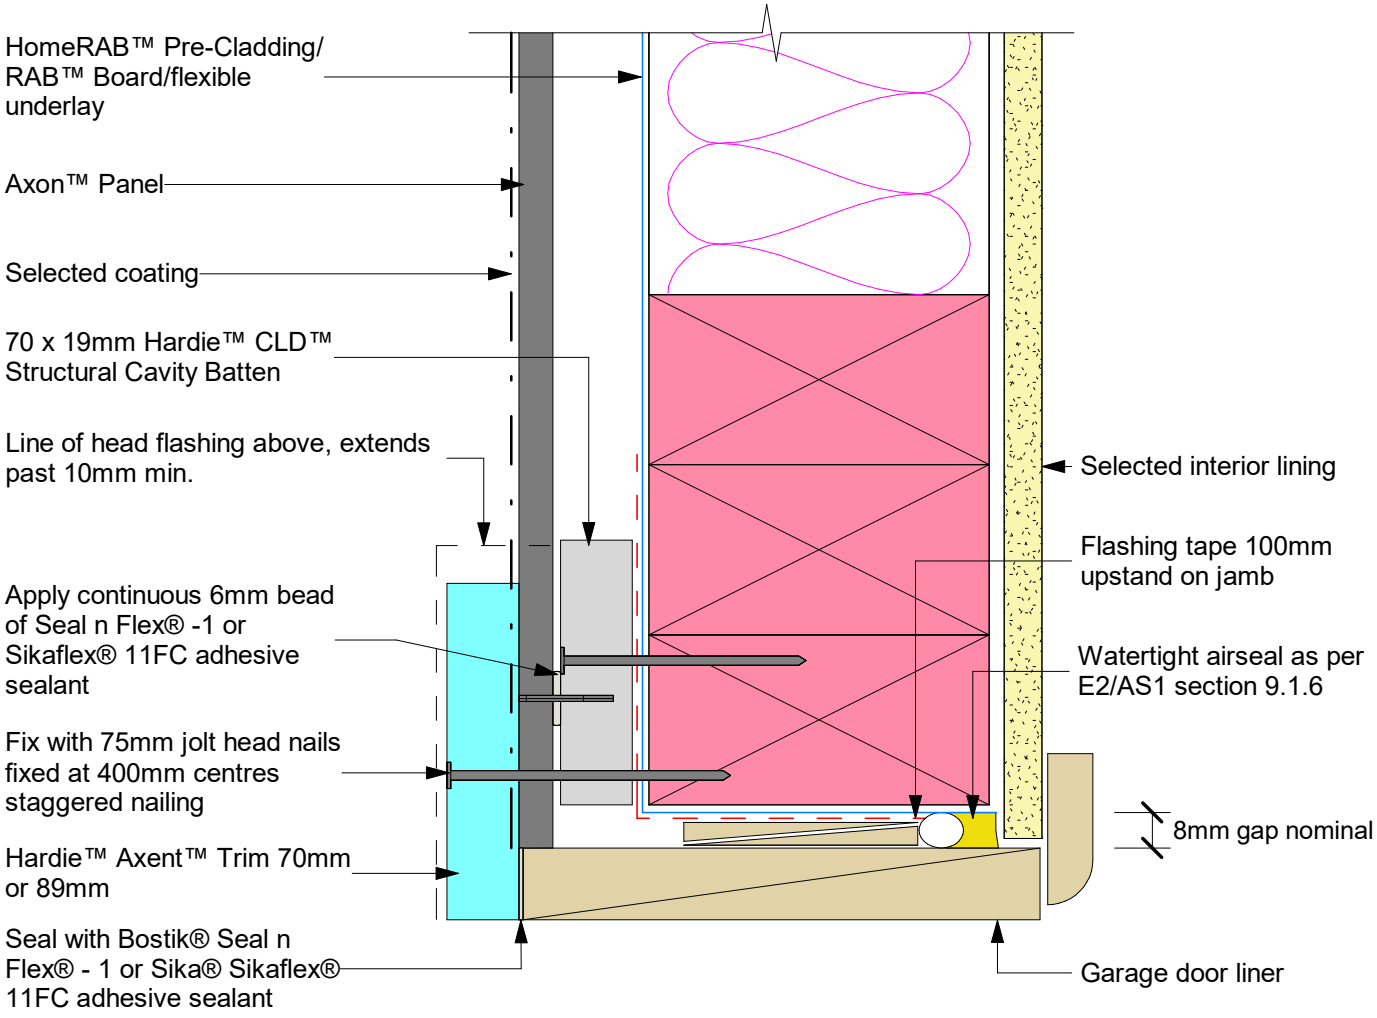
HomeRAB™ Pre-Cladding/ RAB™ Board/flexible underlay
Axon™ Panel
Selected coating
70 x 19mm Hardie™ CLD™ Structural Cavity Batten
Line of head flashing above, extends past 10mm min.
Apply continuous 6mm bead of Seal n Flex® -1 or Sikaflex® 11FC adhesive sealant
Fix with 75mm jolt head nails fixed at 400mm centres staggered nailing
Hardie™ Axent™ Trim 70mm or 89mm
Seal with Bostik® Seal n Flex® - 1 or Sika® Sikaflex® 11FC adhesive sealant
Selected interior lining
Flashing tape 100mm upstand on jamb
Watertight airseal as per E2/AS1 section 9.1.6
8mm gap nominal
Garage door liner