

Selected interior lining

Selected coating

Axon™ Panel Fixed to bottom plate. Do not fix to joist

Axon™ Panel

Timber cavity batten

Hardie™ 9mm panel aluminium horizontal 'h' mould

HomeRAB™ Pre-Cladding/RAB™ Board/flexible underlay


15 mm gap

Seal sheet and sheet edge before installing horizontal flashing

Axon™ Panel fixed to top plate. Do not fix to joist

150mm long horizontal timber packers optional between vertical battens when battens are fixed over studs at 600mm apart. Packers must be set to a fall of 5° min.

Floor level

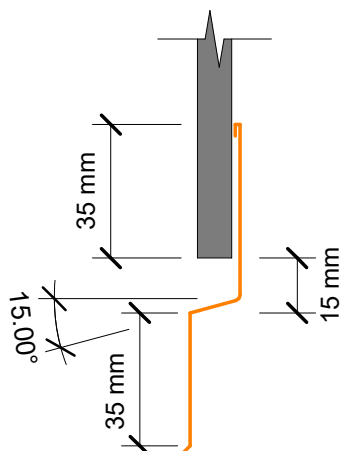

Note: When 50 year durability is required refer Table 20 of NZBC E2/AS1 document.

Alternative Flashing Option