


**Note:**

- Site cut edges to be primed
- Sealant must be installed between head flashing and window flange in VH and above wind zones. Refer to Figure 71 of E2/AS1

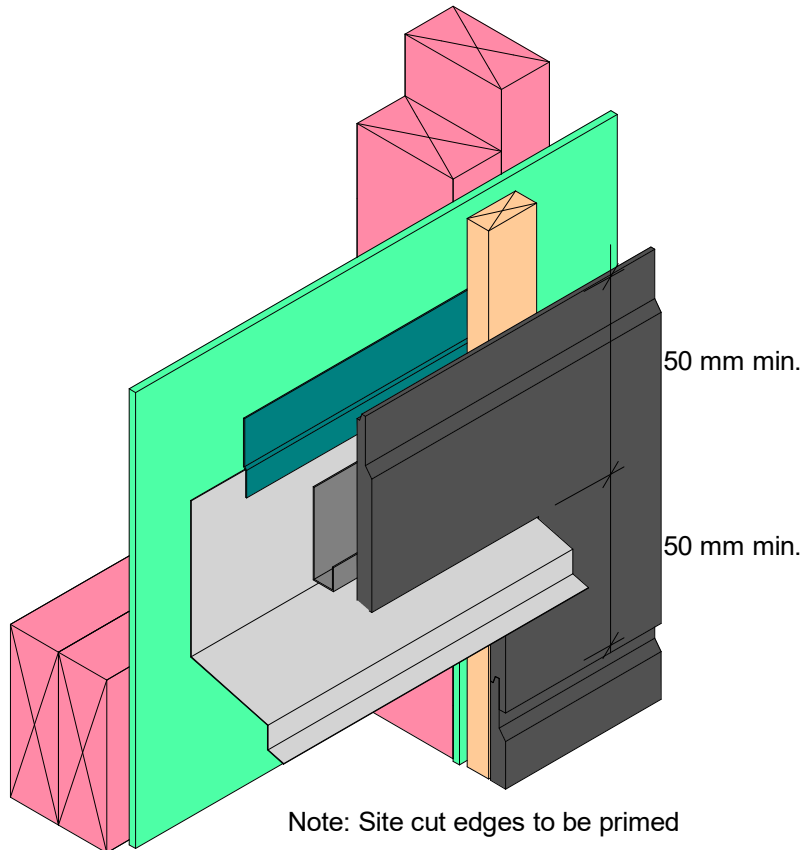

Note: Site cut edges to be primed

jhl\_oblh14\_r\_021

jhl\_oblh14.rvt