

Watertight airseal as per E2/AS1 section 9.1.6


Concrete slab or blockwork

Door Frame (refer to window manufacturer for method of support and fixing)

Oblique™ Weatherboard with selected coating

H3.1 treated packer to suit

Note: Site cut edges to be primed

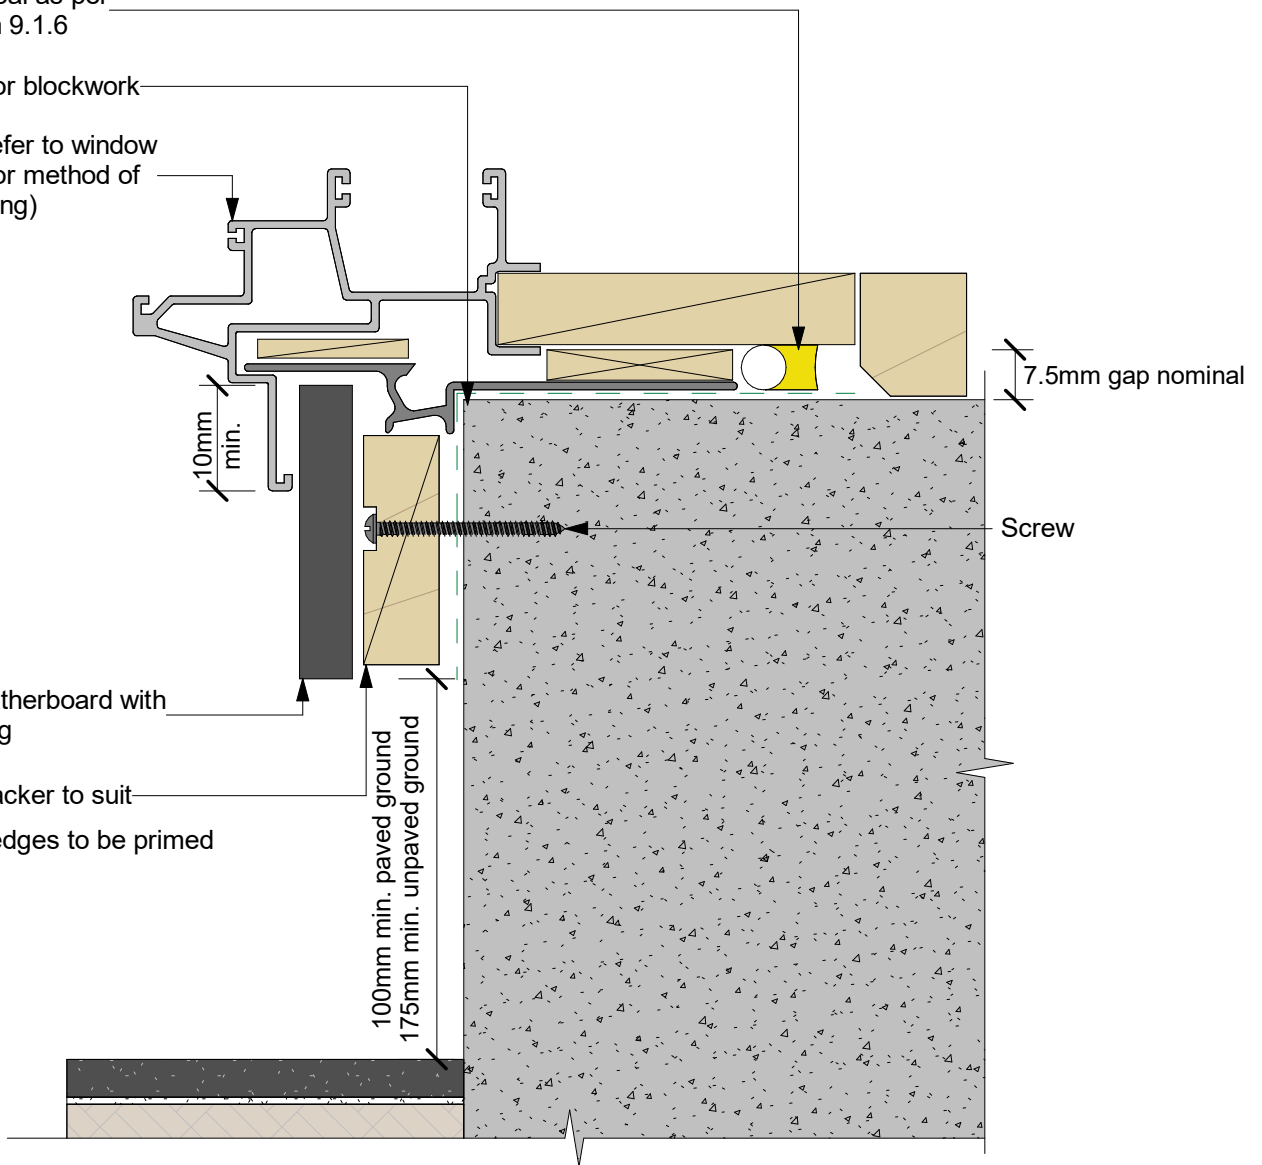

Refer to the manufacturer or supplier for technical information for these materials

General notes for materials selection

1. When HomeRAB™ Pre-Cladding RAB™ Board are used flashing tape to be applied to the entire opening