

Watertight airseal as per
E2/AS1 section 9.1.6

Concrete slab or blockwork

Door Frame (refer to window
manufacturer for method of
support and fixing)


Screw

Fix with adhesive sealant and
brad nail

Stria™ Cladding finished with
selected coating

H3.1 treated packer to suit

Note: Site cut edges to be primed

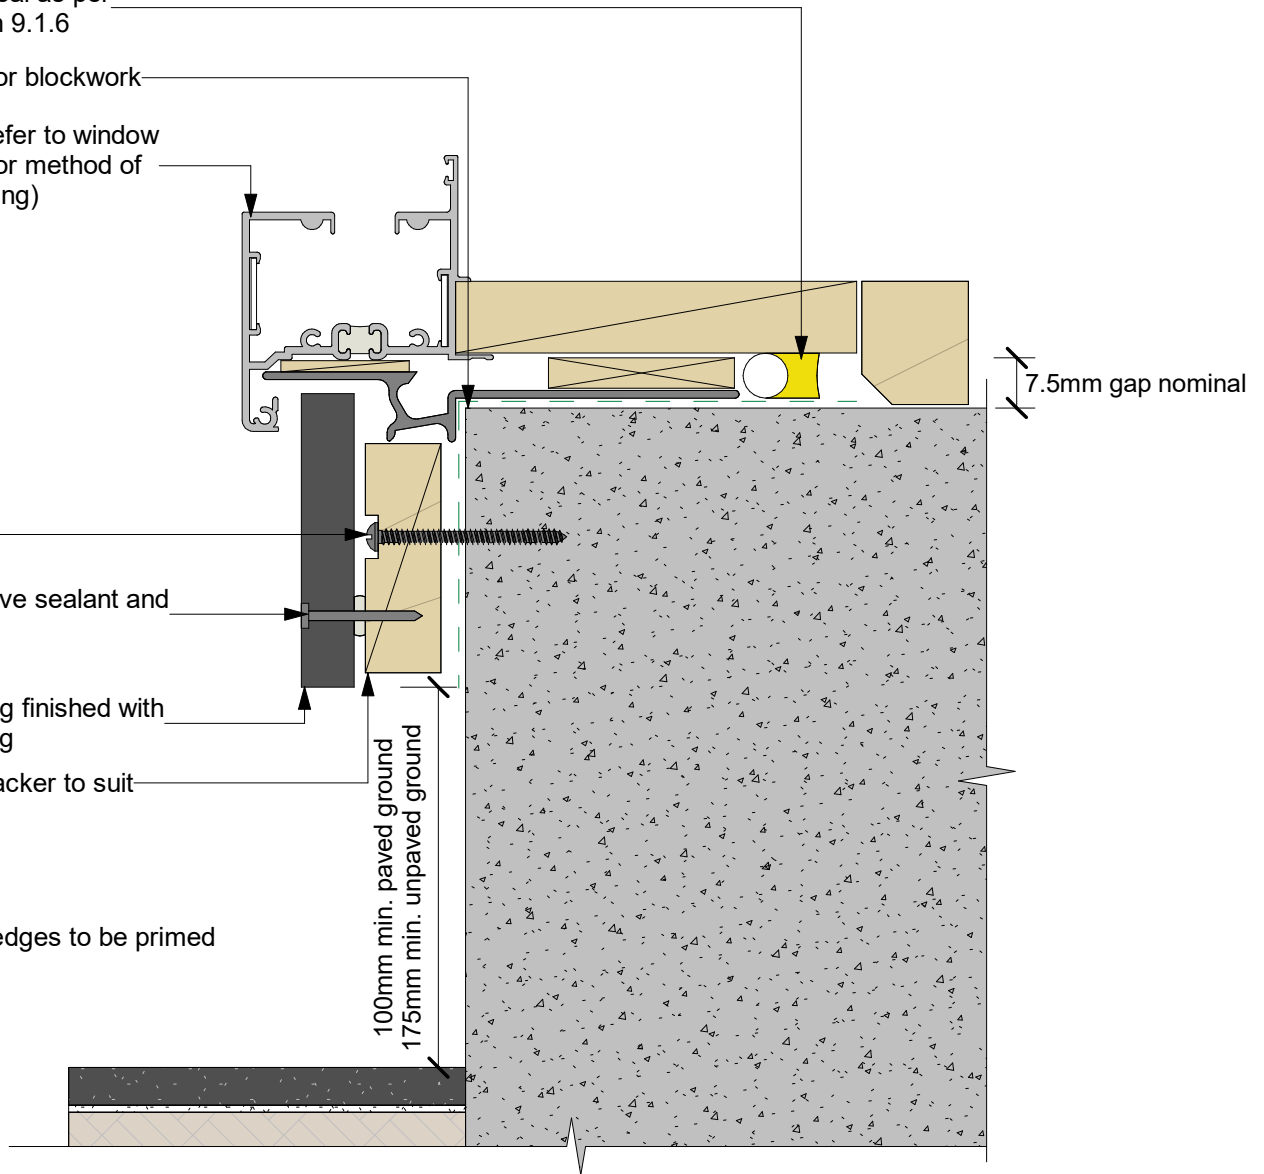

Refer to the manufacturer or supplier for technical information for these materials

General notes for materials selection

1. Flexible underlay must comply with acceptable solution E2/AS1
2. Flashing tape must have proven compatibility with the selected flexible underlay and other materials with which it comes into contact

jhl_sttm_u_024

jhl_sttm.rvt