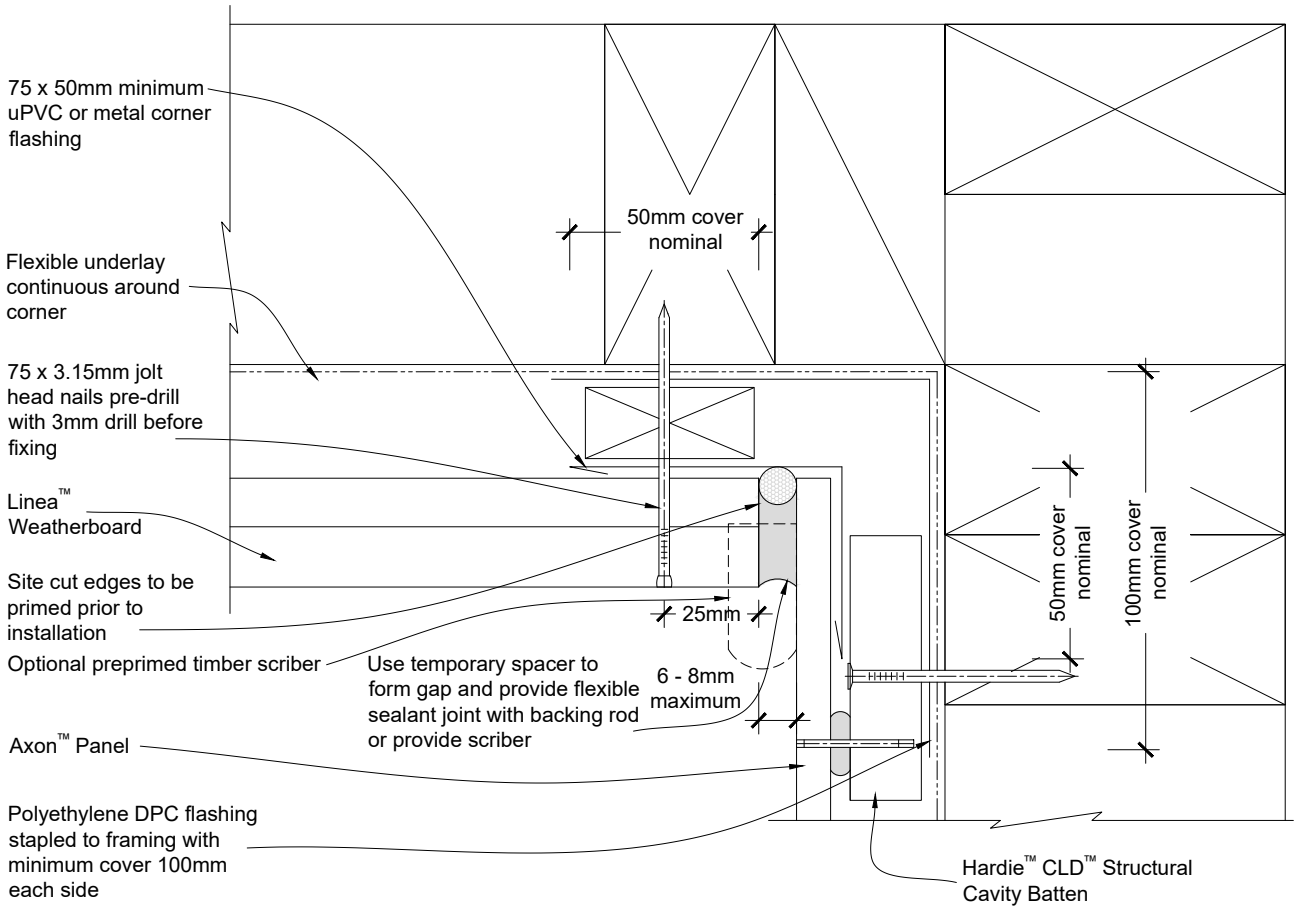
75 x 50mm minimum uPVC or metal corner flashing
Flexible underlay continuous around corner
75 x 3.15mm jolt head nails pre-drill with 3mm drill before fixing
Linea™ Weatherboard
Site cut edges to be primed prior to installation
Optional preprimed timber scriber
Axon™ Panel
Polyethylene DPC flashing stapled to framing with minimum cover 100mm each side
50mm cover nominal
25mm
Use temporary spacer to form gap and provide flexible sealant joint with backing rod or provide scriber
6 - 8mm maximum
50mm cover nominal
100mm cover nominal
Hardie™ CLD™ Structural Cavity Batten