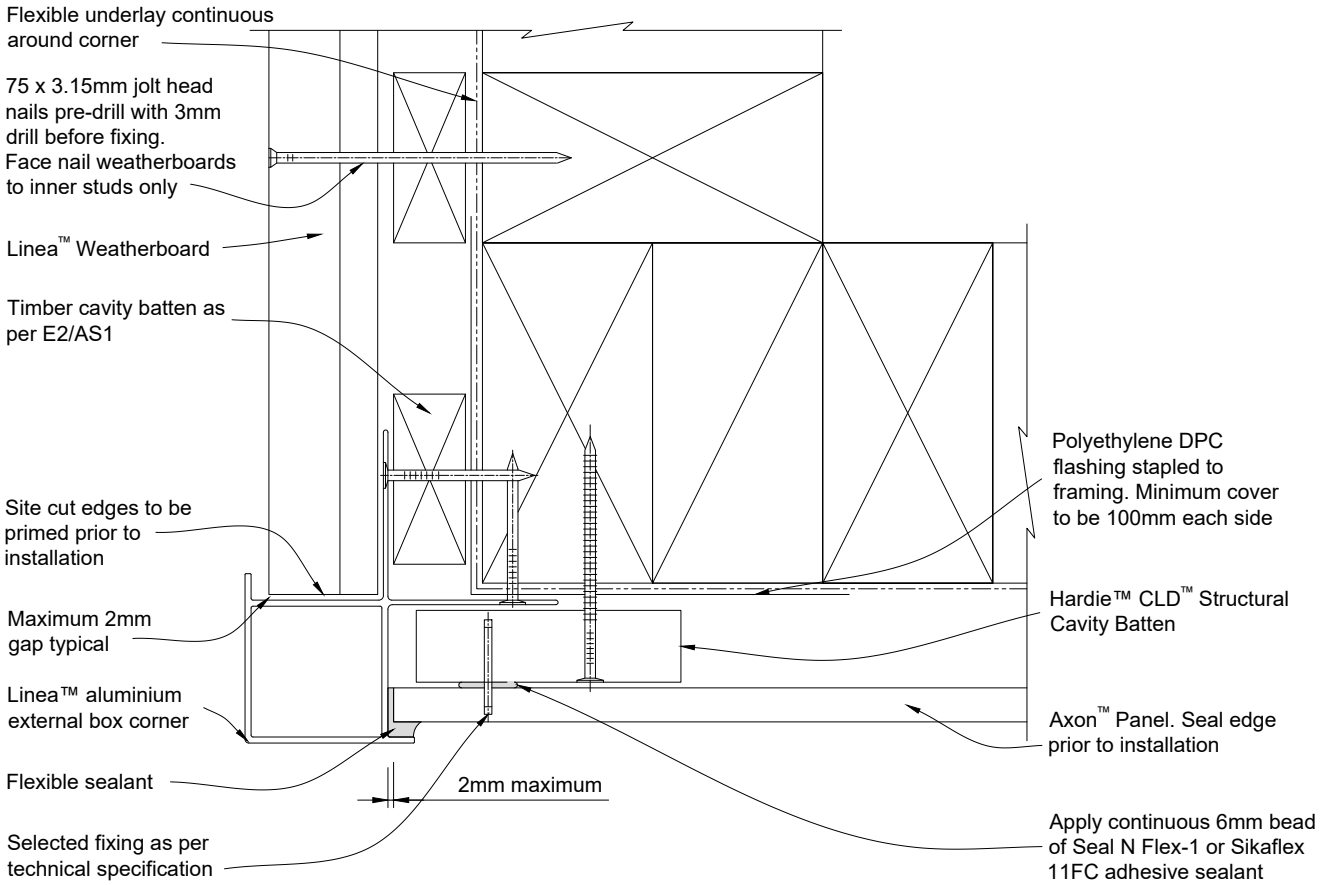
Flexible underlay continuous around corner
75 x 3.15mm jolt head nails pre-drill with 3mm drill before fixing. Face nail weatherboards to inner studs only
Linea™ Weatherboard
Timber cavity batten as per E2/AS1
Site cut edges to be primed prior to installation
Maximum 2mm gap typical
Linea™ aluminium external box corner
Flexible sealant
Selected fixing as per technical specification
2mm maximum
Polyethylene DPC flashing stapled to framing. Minimum cover to be 100mm each side
Hardie™ CLD™ Structural Cavity Batten
Axon™ Panel. Seal edge prior to installation
Apply continuous 6mm bead of Seal N Flex-1 or Sikaflex 11FC adhesive sealant