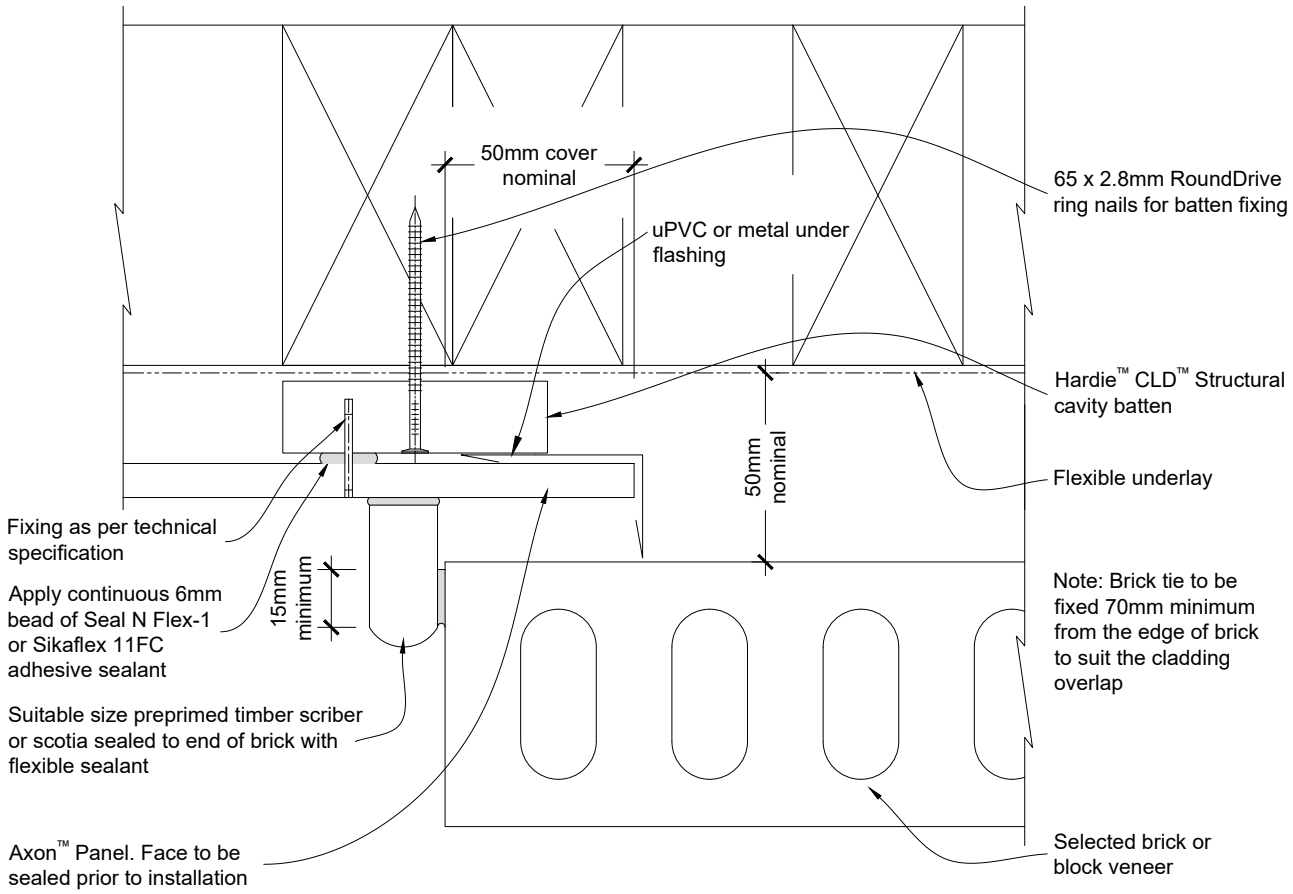
50mm cover
nominal
65 x 2.8mm RoundDrive
ring nails for batten fixing
uPVC or metal under
flashing
Hardie™ CLD™ Structural
cavity batten
50mm
nominal
Flexible underlay
Fixing as per technical
specification
15mm
minimum
Apply continuous 6mm
bead of Seal N Flex-1
or Sikaflex 11FC
adhesive sealant
Note: Brick tie to be
fixed 70mm minimum
from the edge of brick
to suit the cladding
overlap
Suitable size preprimed timber scriber
or scotia sealed to end of brick with
flexible sealant
Axon™ Panel. Face to be
sealed prior to installation
Selected brick or
block veneer