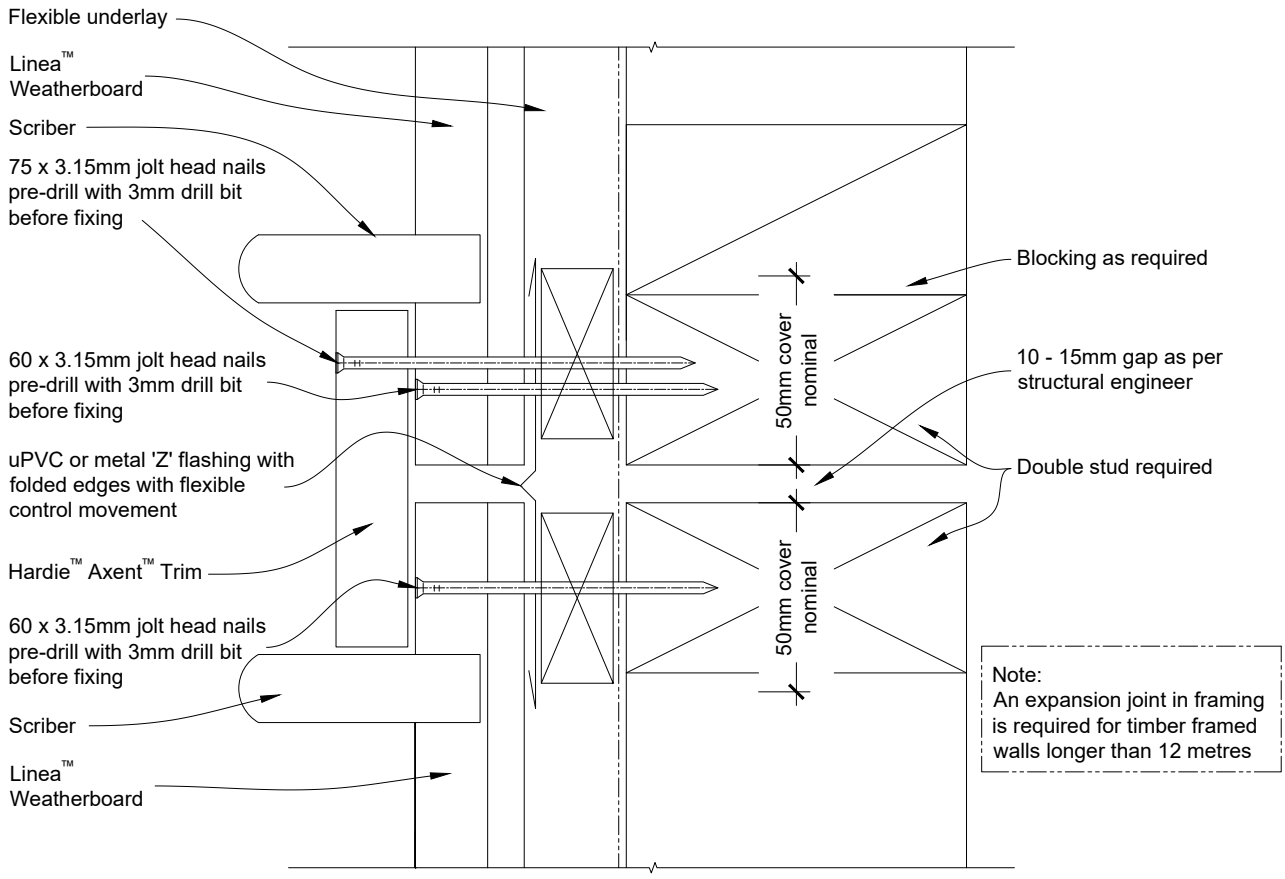
Flexible underlay
Linea™ Weatherboard
Scriber
75 x 3.15mm jolt head nails pre-drill with 3mm drill bit before fixing
60 x 3.15mm jolt head nails pre-drill with 3mm drill bit before fixing
uPVC or metal 'Z' flashing with folded edges with flexible control movement
Hardie™ Axent™ Trim
60 x 3.15mm jolt head nails pre-drill with 3mm drill bit before fixing
Scriber
Linea™ Weatherboard
50mm cover nominal
50mm cover nominal
Blocking as required
10 - 15mm gap as per structural engineer
Double stud required
Note:
An expansion joint in framing is required for timber framed walls longer than 12 metres