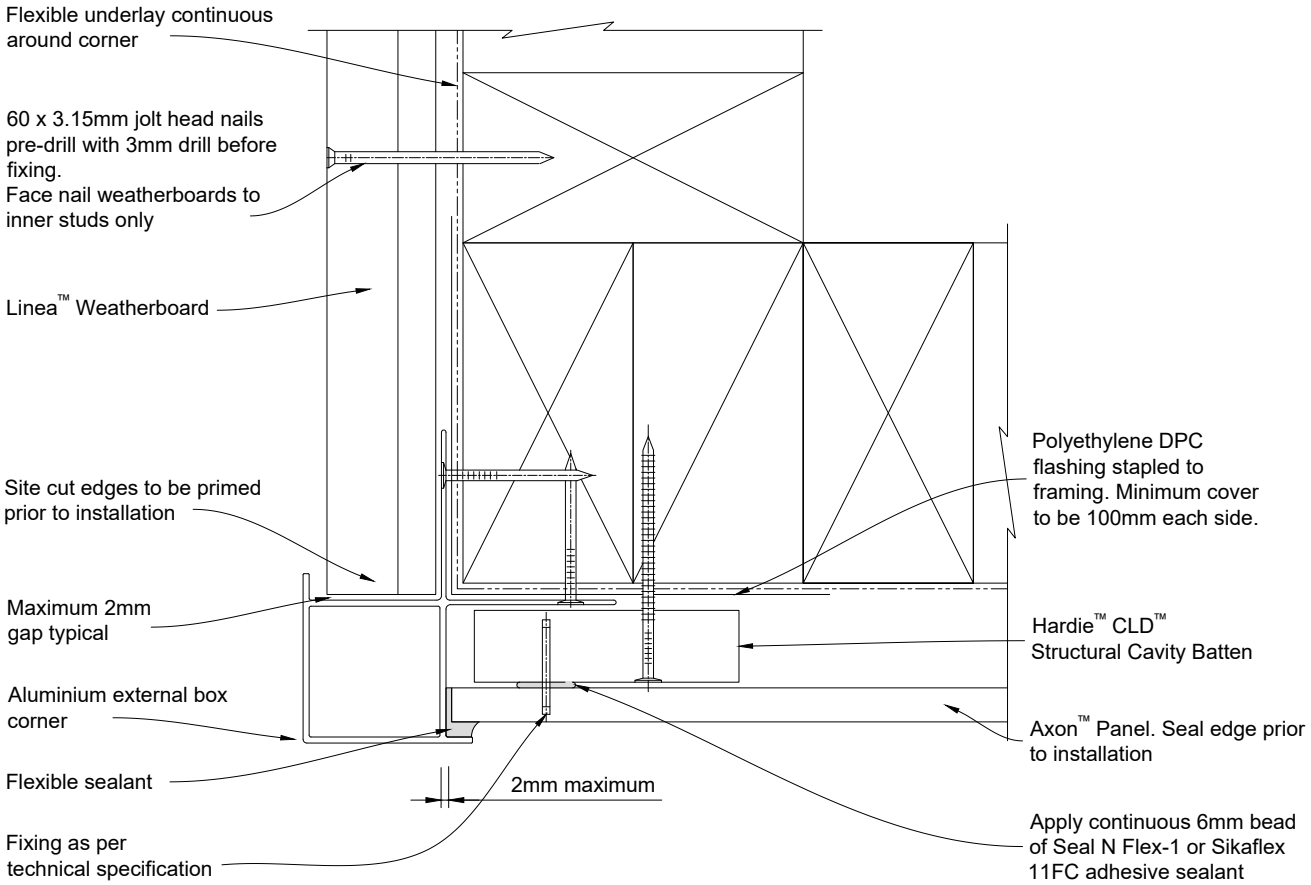
Flexible underlay continuous around corner
60 x 3.15mm jolt head nails pre-drill with 3mm drill before fixing.
Face nail weatherboards to inner studs only
Linea™ Weatherboard
Site cut edges to be primed prior to installation
Maximum 2mm gap typical
Aluminium external box corner
Flexible sealant
Fixing as per technical specification
2mm maximum
Polyethylene DPC flashing stapled to framing. Minimum cover to be 100mm each side.
Hardie™ CLD™ Structural Cavity Batten
Axon™ Panel. Seal edge prior to installation
Apply continuous 6mm bead of Seal N Flex-1 or Sikaflex 11FC adhesive sealant