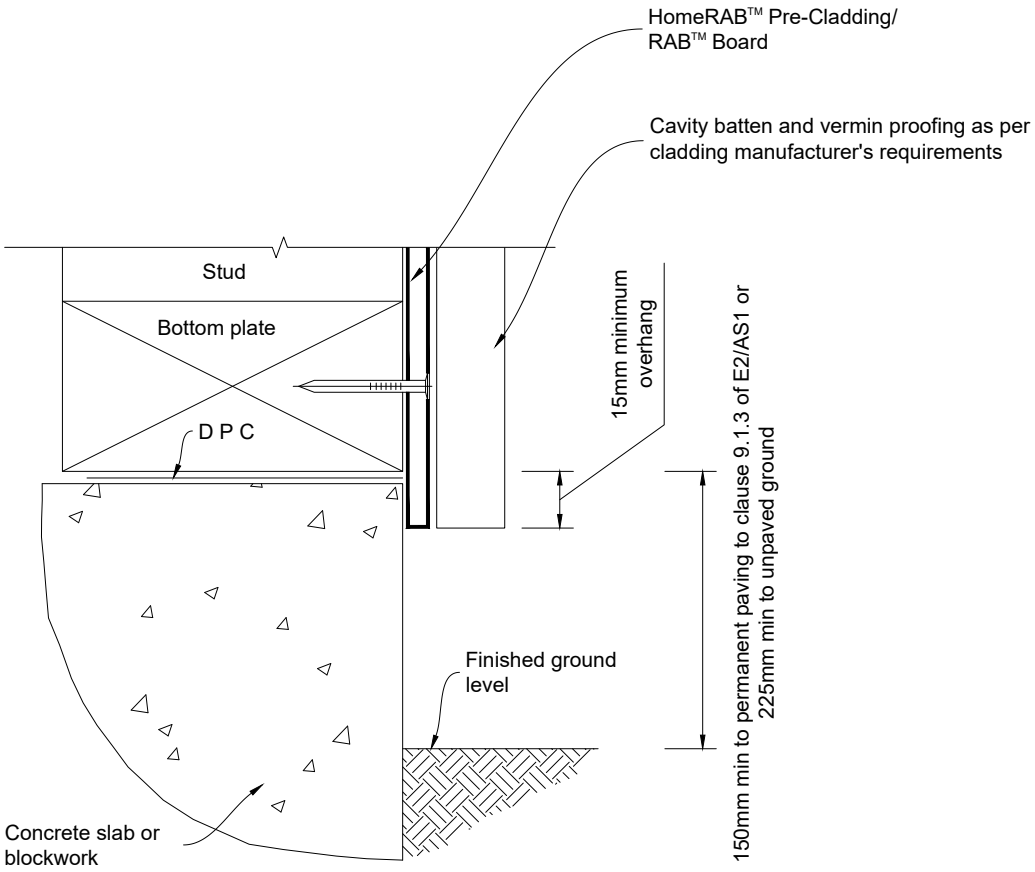
HomeRAB™ Pre-Cladding/
RAB™ Board
Cavity batten and vermin proofing as per
cladding manufacturer's requirements
Stud
Bottom plate
D P C
15mm minimum
overhang
150mm min to permanent paving to clause 9.1.3 of E2/AS1 or
225mm min to unpaved ground
Finished ground
level
Concrete slab or
blockwork